



Blood Bank Refrigerators
Thrombocyte Incubator / Thrombocyte Agitator
Laboratory / Plasma Freezer
Plasma Thawer
Laboratory / Pharmacy / Vaccine Refrigerator
Solar Direct Drive Vaccine Refrigerator
(Ice-lined Thermal Storage Technology)
Mains Powered Vaccine Refrigerator
(Ice-lined Thermal Storage Technology)
Combined Refrigerator + Freezer
12-24 V In-Car Mobile / Power Unit Refrigerator
Incubator
Newborn Product Group
Fluid and Blanket Warming Cabinet
Dry Oven Sterilizer (Etuves) / Water Baths
Cooled Incubator
Stability Test Chamber
BOD Incubators

Since 1975...

EMSAS®

QUALITY & SAFETY PROTECTION



OUR CERTIFICATES



www.emsas-as.com.tr

INDEX

■ BLOOD BANK REFRIGERATORS

EKN Series 6

■ PLATELET & THROMBOCYTE INCUBATORS

ECI Series 8

■ PLATELET & THROMBOCYTE AGITATORS

EAJ Series 9

■ -86 ULTRA-LOW TEMPERATURE FREEZERS

ULT Series 10

■ LABORATORY & PLASMA FREEZERS (-30°C) and (-40°C)

EE Series 12

EF Series 14

■ PLASMA THAWERS (WET & DRY OPTIONS)

EPS / EPT Series 16

■ LABORATORY DRYING AND HEATING OVEN & WATER BATH

■ LABORATORY AND PHARMACY REFRIGERATORS

EKT Series 18

■ INCUBATORS

EKT-I Series 20

■ COMBINED REFRIGERATOR AND FREEZER

EKT-D Series 22

■ ICE LINED REFRIGERATORS

EILS 24

EIL 25

■ EK SERIES REFRIGERATORS 26

■ 12-24 VOLT IN-VEHICLE & POWER UNIT 27

■ NEWBORN PRODUCT GROUP (BABY BOTTLE WARMERS & BREAST MILK REFRIGERATOR+FREEZER)

ANS-F/E/D Series 28

EBI Series 30

■ FLUID AND BLANKET WARMING CABINETS

EMI Series 32

■ CLIMATIC TEST CHAMBERS

KLE Series 34


KLE-F Series 36


■ COOLED INCUBATORS / LABORATORY INCUBATORS

ESI Series 38

■ B.O.D. INCUBATORS

EBOD 39

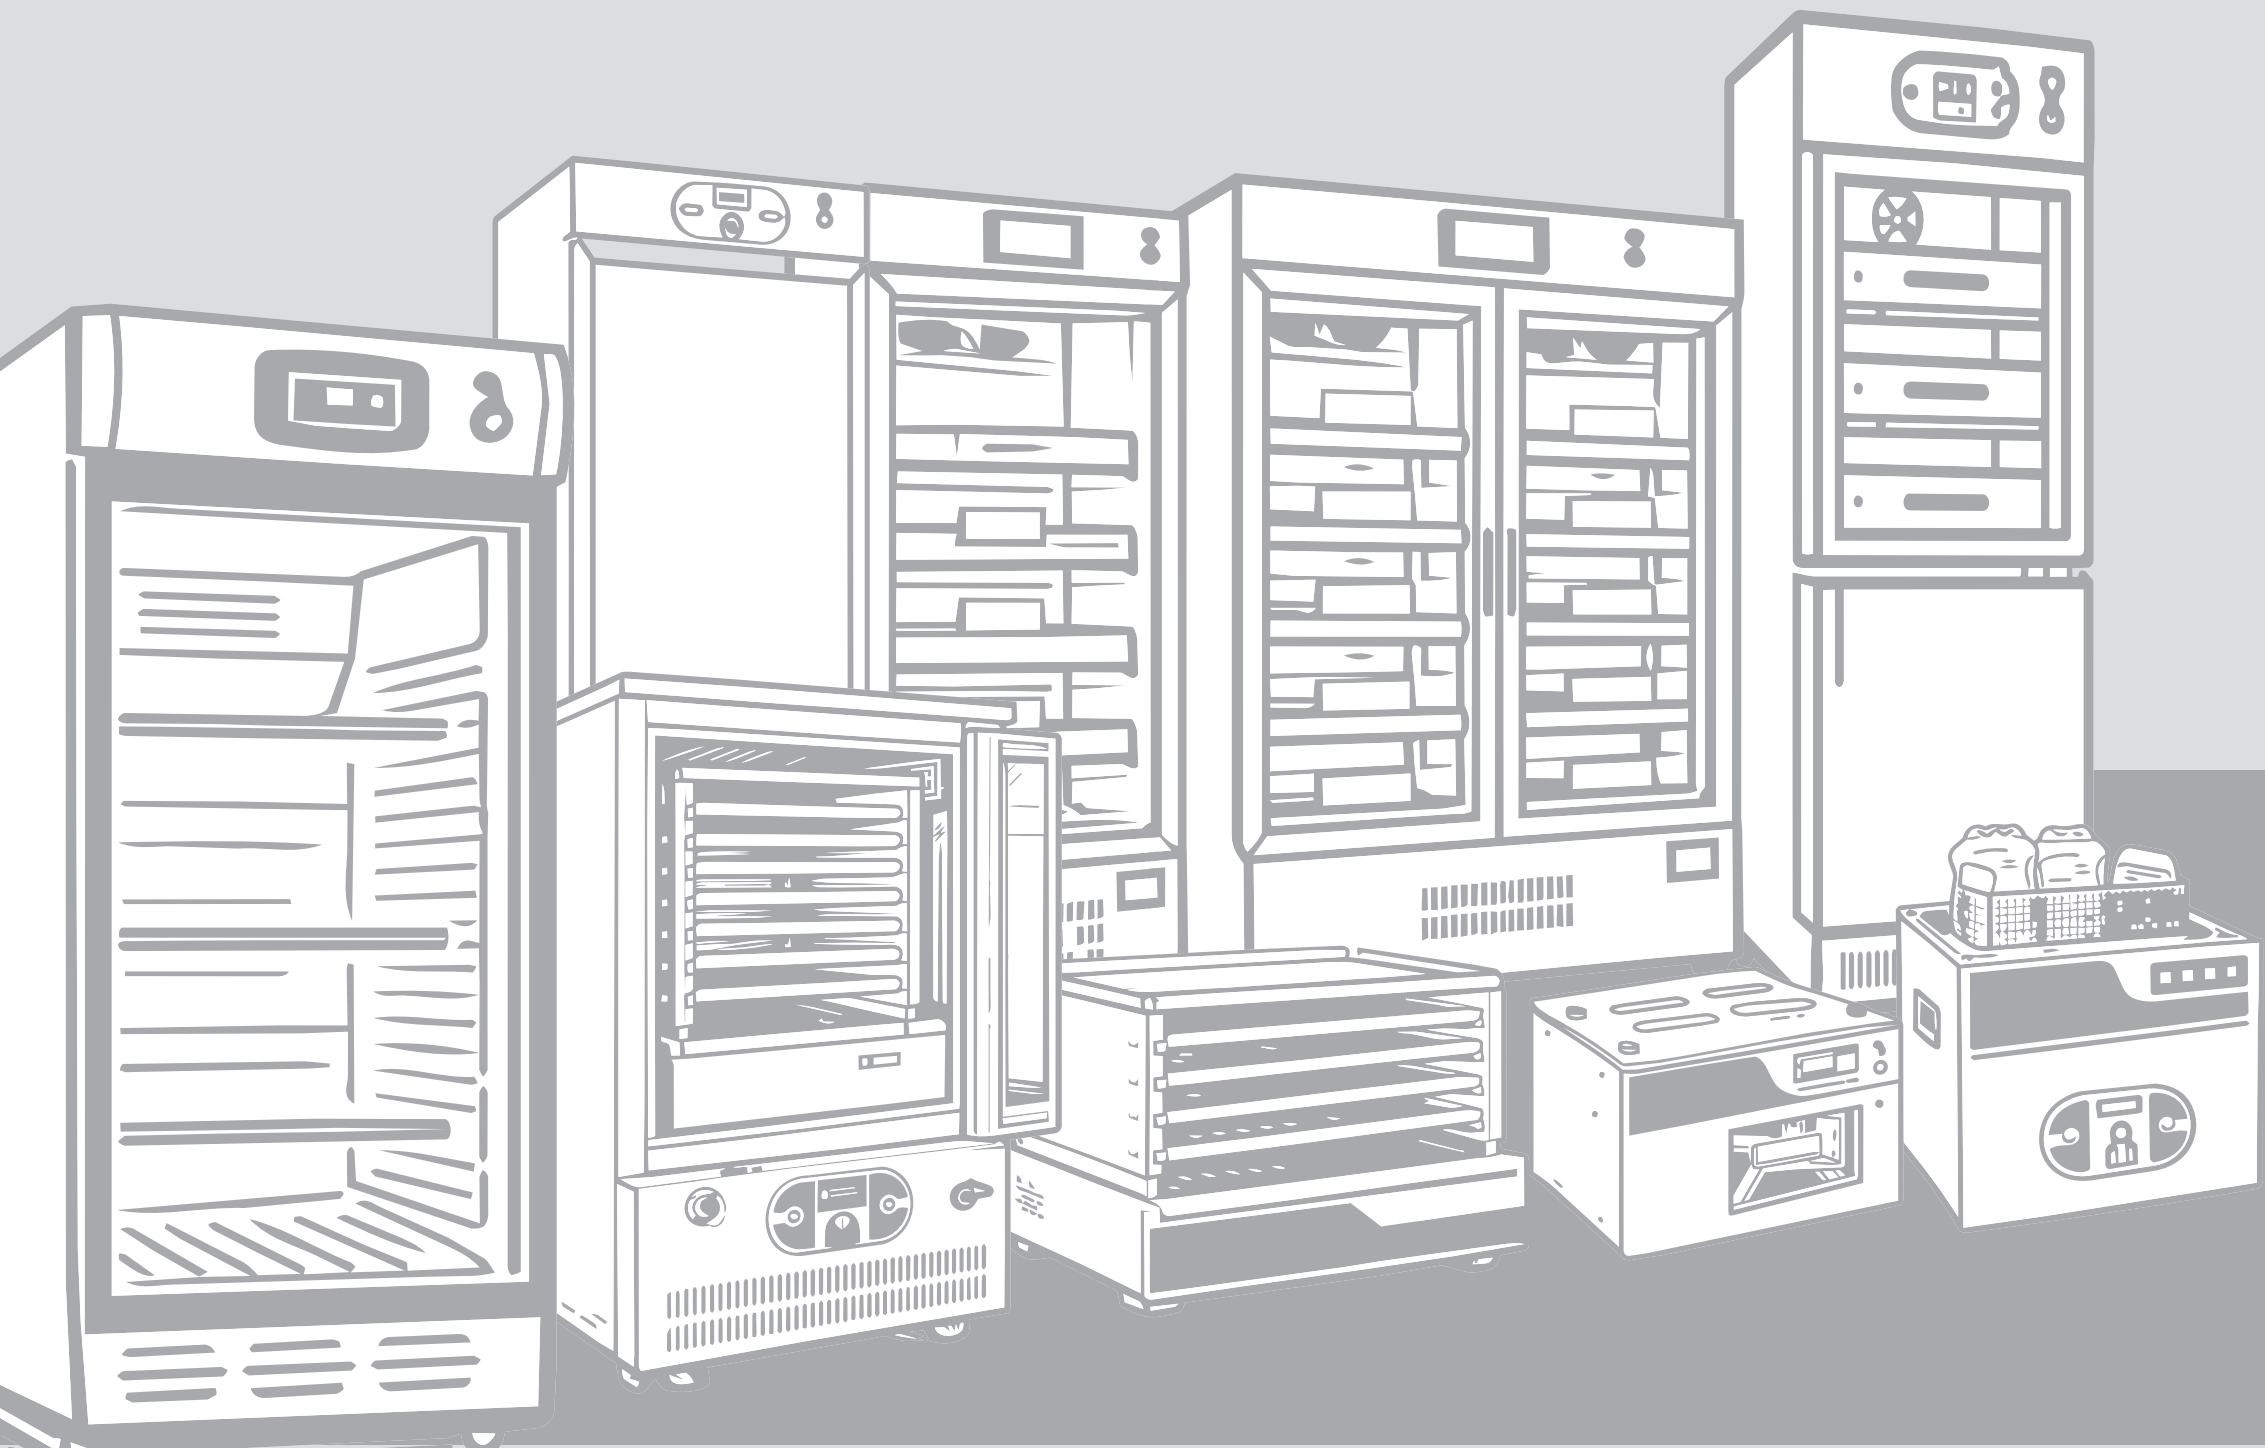

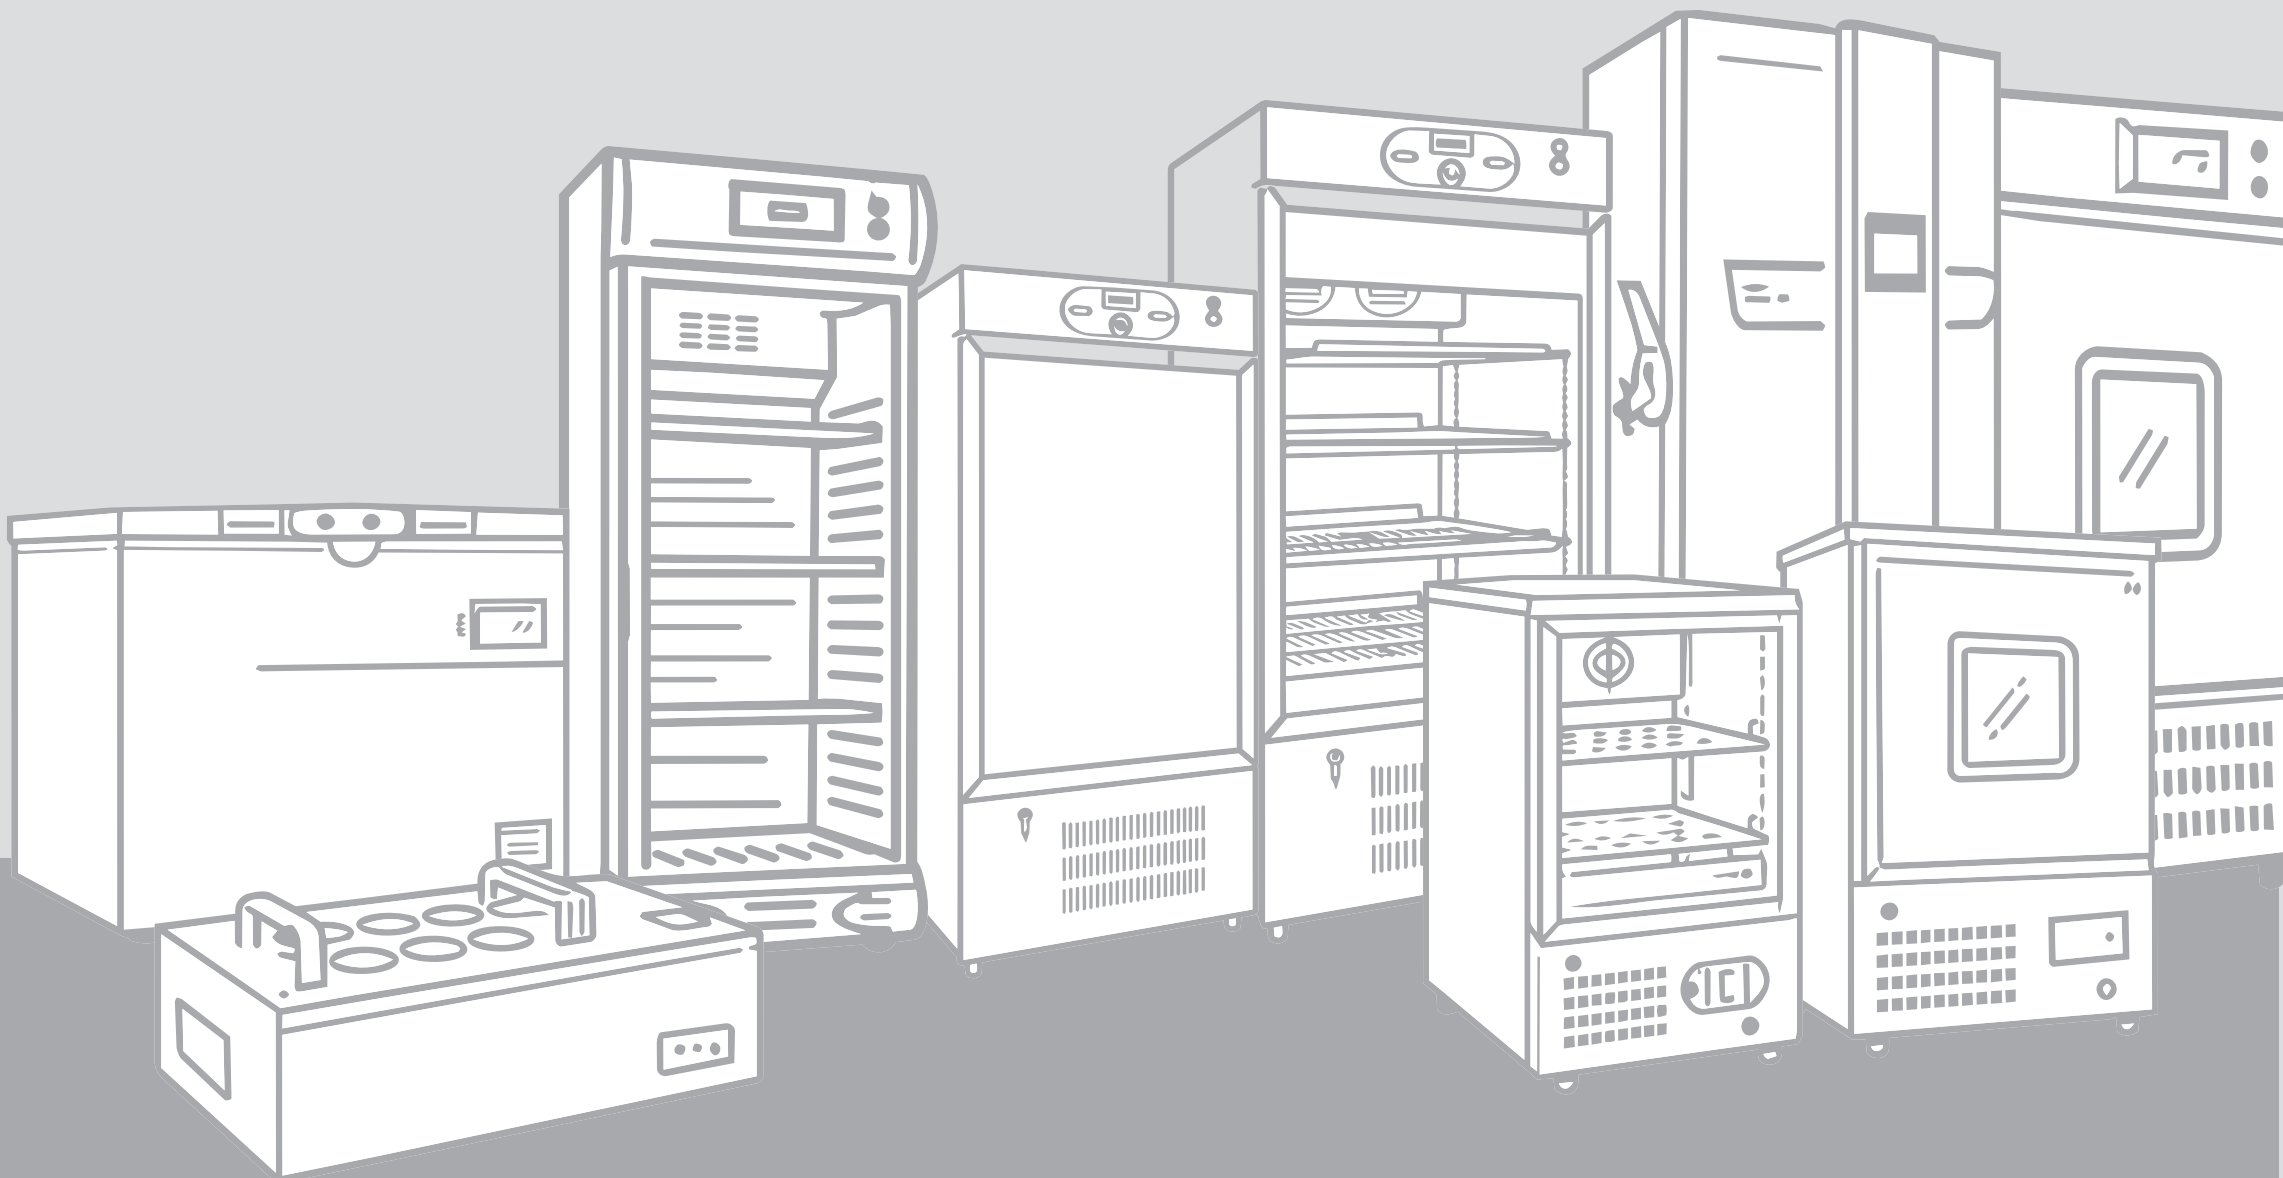

EMSAS[®]

FLUID & BLANKET WARMING CABINETS

EMI Serie (RT +5°C/+80°C)

- Designed for warming medical fluids and blankets.
- Temperature range: RT+5°C to +80°C (default: +50°C).
- Microprocessor-controlled digital panel with 30-day memory and password protection.
- USB data logging system (up to 10 years, Excel export).
- Built-in rechargeable battery system supporting operation during power outages.
- Visual and audible alarm system.
- Electronic and mechanical over-temperature protection.
- Enhanced air circulation system for uniform heating.
- Integrated air filtration system.
- Double-door design with independent temperature zones.
- LED interior lighting.
- Magnetic sealed glass doors.
- External sensor calibration support.
- 2-year warranty.
- Certified according to ISO 9001:2015, ISO 13485, CE, ISO 14001



OPTIONAL

- Password-Protected Digital Touch Control Panel
- Chrome Exterior Surface

EMI Serie



MODEL	EMI 80	EMI 100	EMI 150	EMIX 250	EMI 350	EMI 500
Temperature Range of	RT +5°C / +80°C	RT +5°C / +80°C	RT +5°C / +80°C	RT +5°C / +80°C	RT +5°C / +80°C	RT +5°C / +80°C
Set Temperature	+50°C	+50°C	+50°C	+50°C	+50°C	+50°C
External Dimensions (W*L*H) mm	452*661*768	600*700*910	600*690*1361	765*823*874	600*690*1956	765*850*1956
Capacity / LT	90 L	110 L	185 L	240 L	330 L	500 L (250x2)
Polyurathane Thickness	40 mm	50 mm	40 mm	50 mm	40 mm	50 mm
Gross KG	55 kg	85 kg	90 kg	95 kg	100 kg	130 kg
Internal Lighting	+	+	+	+	+	+
Door Lock	+	+	+	+	+	+
Alarm	+	+	+	+	+	+
Internal Surface Material	Stainless Steel CR-NI 304	Stainless Steel CR-NI 304	Stainless Steel CR-NI 304	Stainless Steel CR-NI 304	Stainless Steel CR-NI 304	Stainless Steel CR-NI 304
External Surface Material	Galvanized Steel with Electrostatic Powder Coated	Galvanized Steel with Electrostatic Powder Coated	Galvanized Steel with Electrostatic Powder Coated	Galvanized Steel with Electrostatic Powder Coated	Galvanized Steel with Electrostatic Powder Coated	Galvanized Steel with Electrostatic Powder Coated
	Stainless Steel CR-NI 304	Stainless Steel CR-NI 304	Stainless Steel CR-NI 304	Stainless Steel CR-NI 304	Stainless Steel CR-NI 304	Stainless Steel CR-NI 304
Heating/Cooling System	Fan-borced	Fan-borced	Fan-borced	Fan-borced	Fan-borced	Fan-borced
Insulation	CFC-Free Polyurathane	CFC-Free Polyurathane	CFC-Free Polyurathane	CFC-Free Polyurathane	CFC-Free Polyurathane	CFC-Free Polyurathane
Number of Drawer (Cr-Ni)	1 Pcs	2 Pcs	3 Pcs	5 Pcs	5 Pcs	5 Pcs
PC Connection	USB	USB	USB	USB	USB	USB
Wheels	2 Braked , 2 Caster	2 Braked , 2 Caster	2 Braked , 2 Caster	2 Braked , 2 Caster	2 Braked , 2 Caster	2 Braked , 2 Caster
5'5 inch Touch Screen Display	Optional	Optional	Optional	Optional	Optional	Optional
Voltage / Hz	220v-50hz / 110v-60hz	220v-50hz / 110v-60hz	220v-50hz / 110v-60hz	220v-50hz / 110v-60hz	220v-50hz / 110v-60hz	220v-50hz / 110v-60hz
Chrome Shelf	Optional	Optional	Optional	Optional	Optional	Optional



www.emsas-as.com.tr
www.kandolabi.com
www.asidolabi.com
ISO 9001:2008
ISO 13485



Contact



Promotional Film



Product Introduction
Videos

Muradiye Sanayi Bölgesi Muradiye Mahallesi
28 Sokak No:6 Yunusemre - MANİSA / TURKEY
Tel: +90 (236) 214 03 96 - 97 - 98 Fax: +90 (236) 214 07 06
İzmir Tel: +90 (232) 479 55 22 - 479 55 23
mail: info@emsas-as.com.tr